

## TA 50 Gear Locker Specifications

Size and quantity shall be as specified on the drawings.

**Mesh:** 1 ½ square 10ga. (.135 thick) welded wire or 1 ½" 13 gauge expanded metal.

**Sides:** 1 ¼ x 1 ¼ x 1/8 angle and channel with 1 ½ square welded wire securely welded to frame

**Door(s):** 1 ¼ x 1 ¼ x 1/8 angle with 1 ½ square welded wire securely welded to frame. Doors have full length angle strike, three point cane bolt lock on double door units with chrome plated padlockable handle.

**Top:** Formed 16 gauge sheet with 1 ¼" flanges and formed integral door stop. Top welded to locker frame.

**Shelf:** Formed 16 gauge sheet with one piece coat rod bolted to underside of shelf. Shelf is welded to locker sides.

**Bottom:** Formed 14 gauge sheet, 4" high, welded to locker assembly

**Back:** 20 gauge sheet metal securely welded to locker frame

**Coat Rod:** ¾" schedule 40 pipe welded to 1/8" x 1 ¼" mounting brackets. Finish is hot dip galvanized.


**Coat Hooks:** Three per unit standard, mounted at back under shelf.

**Hardware:** All interconnecting and assembly hardware is supplied..


**Finish:** All non-plated parts shall receive one prime coat of gray acrylic enamel electro statically applied. Product is finished for interior applications. Materials are subject to nicks and scrapes while in transit. Touch up paint is provided.

**Note:** Lockers are all welded construction and are shipped fully assembled, except for floor mounting clips.

**Standard Size:** 24" deep x 42" wide x 78" high  
**Optional Sizes Available**

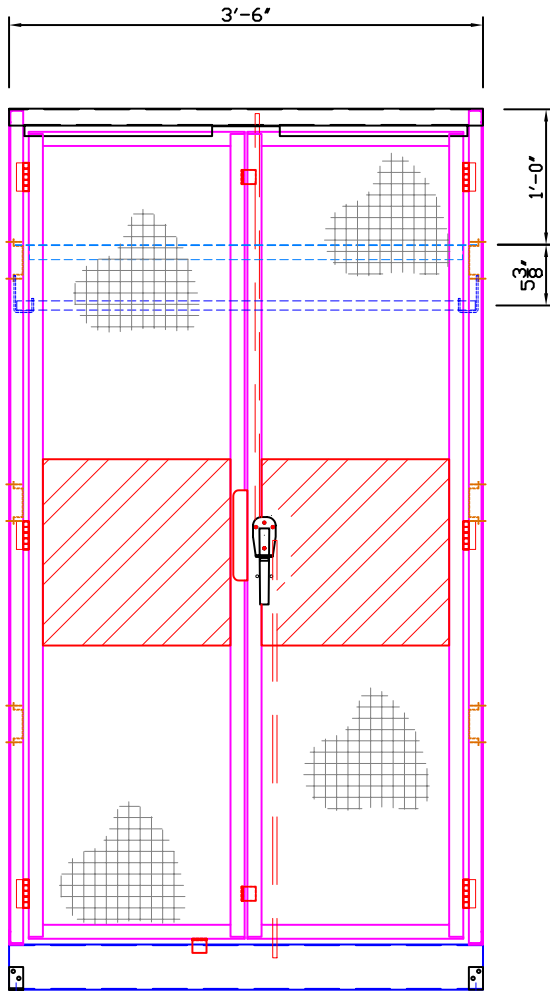

FRONT VIEW

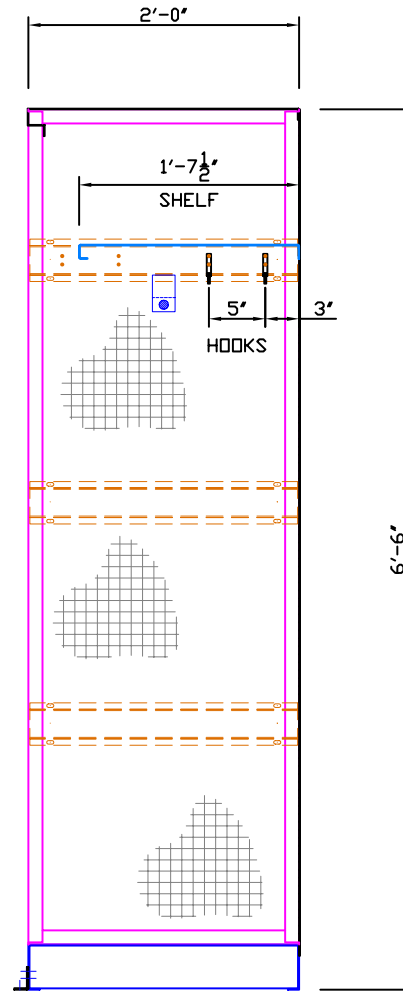

SIDE VIEW



**American Warehouse Systems**

[www.aw-systems.com](http://www.aw-systems.com)

TF: 877-677-9066

PH: 763-315-9200

FX: 763-315-9222

TA-50 GEAR LOCKER

Drawing No.

TA-50 Gear Locker

Edition

Sheet

1 of 1